


# Testexport

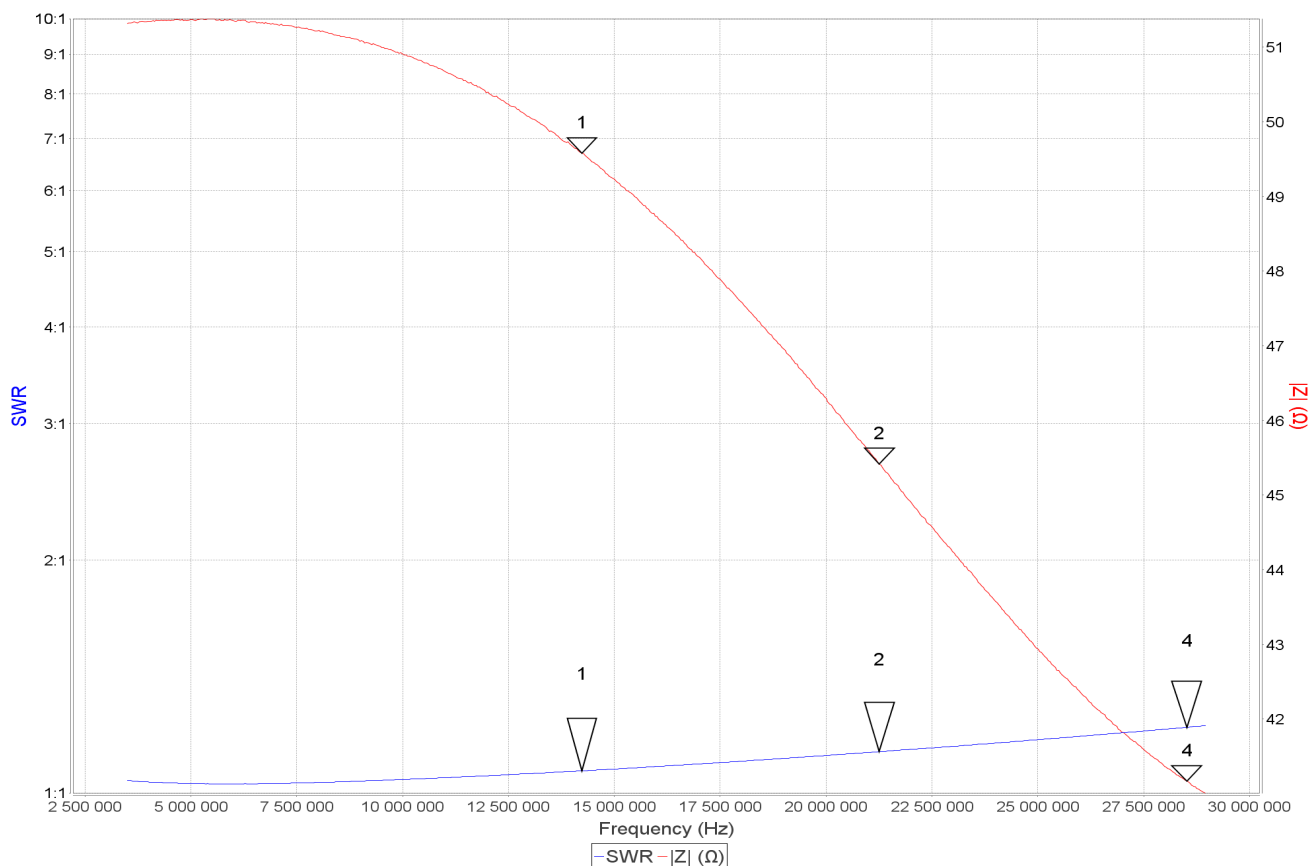

Marker	Freq. (Hz)	RL (dB)	RP (°)	TL (dB)	TP (°)	SWR	Z  (Ω)	Rs (Ω)	Xs (Ω)
1	14 232 568	-29,69	-97,39	0,00	0,00	1,07:1	49,6	49,5	-3,2
2	21 253 120	-24,27	-141,79	0,00	0,00	1,13:1	45,4	45,3	-3,4
1-2	7 020 552	5,42	44,40	0,00	0,00	---	4,2	4,2	0,2
4	28 515 760	-20,24	174,85	0,00	0,00	1,22:1	41,2	41,2	0,7

## Comment:

Date: 28/11/18 16:08  
 Mode: Reflection  
 Analyser: miniVNA-pro / mini radio solutions - miniVNA pro  
 Scan  
     Start: 3500000 / 3 500 000  
     Stop: 28999936 / 28 999 936  
     Samples: 632  
     Overscan: 1  
 Calibration  
     Samples: 2000  
     Overscan: 1  
     File: REFL\_miniVNA-pro.cal  
 User: Dell-Optiplex-380